

Investigations for Statistically Controlled TIG Welding Solution of 304 SS

Rupinder Singh

Department of Production Engineering, Guru Nanak Dev Engineering College, Ludhiana – 141 006, India
 E-mail: rupindersingh78@yahoo.com

Abstract - The purpose of the present investigations is to study statistically controlled solution (from sensitization point of view) for 304 stainless steel (ss) joints using tungsten inert gas welding (tig) process. starting from the parametric optimization of tig welding process parameters (based upon taguchi design), welded joints were produced for functional validation. the output parameters selected for controlling the sensitization were selected as hardness and tensile strength of welded joints. the results are supported by sem analysis. further the study suggests that the tig welding process was found to be under statistical control (at optimized settings suggested by taguchi design) as regard to sensitization of welded joint is concerned.

Keywords: TIG welding, statistically controlled, sensitization, hardness, tensile strength.

I. INTRODUCTION

In TIG welding process workpiece are joined by the heat obtained from an electric arc struck between a non-consumable electrode and work piece in the presence of inert gas atmosphere [Natrajan and Kumaresh, 2006]. For industrial applications 304SS is mostly welded by this process and the joints prepared are susceptible to a phenomenon known as sensitization at elevated temperatures between 400°C -850°C [Mousavi and Misersmaeilli, 2008, Qinglei et al., 2010]. Sensitization is a major problem in welding of S.S that affects the alloys durability [Yan et al., 2010]. The literature review reveals that lot of work has been reported on the optimization of physical/mechanical properties of welded joints and reduction of sensitization during welding of 304 S.S by different techniques [Kumar and Shahi, 2011, Traidia and Roger, 2011, Yuri et al., 2000]. But hitherto no work has been reported on statistically controlled TIG welding solution of 304SS from sensitization point of view. So, in the present work effort has been made to investigate statistically controlled TIG welding solution of 304 SS (based upon Taguchi model) with focus on sensitization. Table1 and 2 respectively shows chemical composition of workpiece material and input parameters (namely: welding current, pulse frequency and gas flow (GF) rate and their levels based upon Taguchi L9 OA) for investigation of sensitization phenomenon in 304 S.S. The output parameters set for study are hardness and tensile strength.

TABLE 1 CHEMICAL COMPOSITION OF 304 S.S (%WT)

| Element | C | Mn | Si | Cr | Ni | Mo |
|---------|-------|------|-------|-------|----|-------|
| SS | 0.035 | 1.08 | 0.388 | 18.47 | 9 | 0.561 |

TABLE 2 INPUT PARAMETER AND THEIR LEVELS

| S. No. | Current (A) | Pulse frequency(Hz) | GF rate (lt/min) |
|--------|-------------|---------------------|------------------|
| 1 | 40 | 3 | 5 |
| 2 | 40 | 5 | 8 |
| 3 | 40 | 7 | 10 |
| 4 | 60 | 3 | 8 |
| 5 | 60 | 5 | 10 |
| 6 | 60 | 7 | 5 |
| 7 | 80 | 3 | 10 |
| 8 | 80 | 5 | 5 |
| 9 | 80 | 7 | 8 |

II. EXPERIMENTATION

Based upon Table2, Table3 shows observations (with three repetitions) for hardness (H1, H2 and H3) and tensile strength (T1, T2 and T3) of welded joints with TIG welding process.

TABLE 3 OBSERVATIONS FOR HARDNESS AND TENSILE STRENGTH OF WELDED JOINTS

| Hardness (HRC) | | | Tensile strength $\times 10^3$ kgf | | |
|----------------|----|----|------------------------------------|------|------|
| H1 | H2 | H3 | T1 | T2 | T3 |
| 60 | 59 | 57 | 5.8 | 5.4 | 5.32 |
| 70 | 68 | 66 | 5.8 | 5.62 | 5.75 |
| 82 | 81 | 80 | 6.1 | 5.84 | 5.9 |
| 63 | 60 | 62 | 5.9 | 5.82 | 5.7 |
| 79 | 77 | 76 | 6.8 | 6.72 | 6.65 |
| 76 | 74 | 72 | 5.35 | 5.22 | 5.3 |
| 81 | 80 | 78 | 6.92 | 6.75 | 6.9 |
| 83 | 80 | 82 | 8.0 | 7.9 | 7.85 |
| 83 | 81 | 79 | 7.1 | 6.8 | 6.9 |

Further based upon Table 2 and 3, Table 4 shows signal to noise (S/N) ratios for hardness and tensile strength. The analysis has been made on the basis of maximum the better type case. Now based upon Table 4, Figure1 shows percentage contribution of input parameters for outputs.

TABLE 4 S/N RATIOS FOR OUTPUT PARAMETERS


| S/N for Hardness (HRC) | S/N for Tensile strength $\times 10^3$ kgf |
|------------------------|--|
| 35.36187 | 74.70595 |
| 36.64266 | 75.15067 |
| 38.16838 | 75.48098 |
| 35.79562 | 75.27592 |
| 37.76397 | 76.55061 |
| 37.37829 | 74.46777 |
| 38.02231 | 76.72065 |
| 38.23783 | 77.97004 |
| 38.1996 | 76.81466 |

As observed from Figure 1 contribution of input parameters for hardness and tensile strength of welded joints is: current (36% and 68%), pulse frequency (39% and 18%) and GF rate (23% and 5%) respectively.


The optimized settings of input parameters for welded joints are as follows:

- For maximum hardness: current (80A), pulse freq (7Hz) and gas flow rate (10ltr/min)
- For maximum tensile strength: current (80A), Pulse freq.(5Hz),G.F Rate (10ltr/min)

The confirmatory experiments were conducted at these optimized settings and percentage improvement in hardness and tensile strength is 6% and 0.6% respectively. Figure 2 shows SEM images of welded joints at optimized settings.

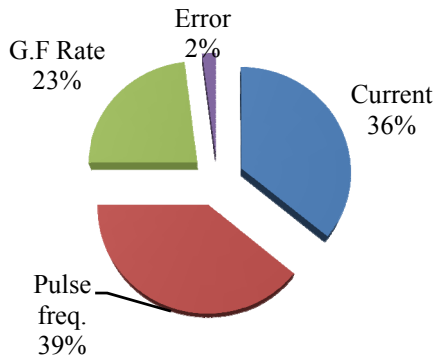


a.) Hardness of welds

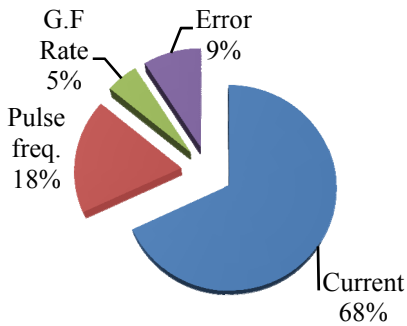


b.) Tensile strength of welds

Fig. 1 Percentage contribution of input parameters for outputs

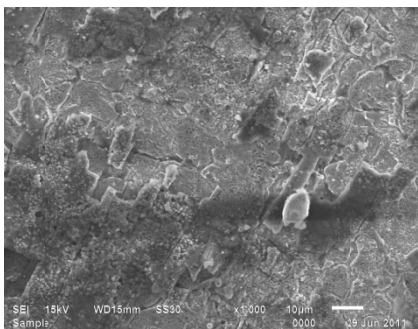

SEM of work piece joint obtained at optimized settings for hardness (88HRC)

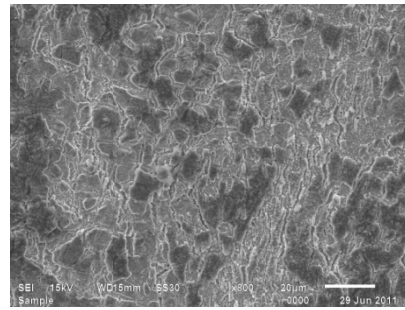

SEM of work piece joint obtained at optimized settings for tensile strength (8.05×10³kgf)

Fig. 2 SEM of welded joints at optimized settings

As observed from Figure 2 sensitization has occurred over the surface on welded joints but level of sensitization is less at optimized settings (as per Taguchi design) as evidenced from improved hardness and tensile strength.

III. ANALYSIS AND DISCUSSION

Further based upon optimized settings suggested by Taguchi design, to understand whether the process is statistically controlled (06+06=12) welded joint samples were prepared for maximum hardness (with input parameter setting as current 80A, pulse freq 7Hz and GF rate 10ltr/min) and for maximum tensile strength at current 80A, pulse freq.5Hz,G.F rate 10ltr/min. On measurement of hardness and tensile strength observations are shown in Table5 and 6 respectively. Based upon Table5 and 6, Figure3 and 4 respectively shows run-chart of the observed values of hardness and tensile strength.

Now if the mean and standard of population that is having normal distribution is μ and σ respectively then for variable data X the standard normal deviate Z is defined as:

$$Z = \frac{(X_i - \mu)}{\sigma}$$

Where X_i is the variable data obtained, μ is the mean of data and σ is the standard deviation [Singh and Singh, 2009, Singh, 2012].

TABLE 5 OBSERVED VALUE OF HARDNESS (HRC) AT OPTIMIZED SETTINGS

| S. No. | Observation | Above or Below Mean | Up or Down |
|--------|-------------|---------------------|--------------------|
| 1 | 84.69 | B | |
| 2 | 84.75 | B | U |
| 3 | 84.79 | B | U |
| 4 | 84.86 | A | U |
| 5 | 84.84 | A | D |
| 6 | 84.89 | A | U |
| MEAN | 84.803 | E _{AB} =1 | E _{UD} =2 |

TABLE 6 OBSERVED VALUE OF TENSILE TRENGTH×10³KGF AT OPTIMIZED SETTINGS

| S.No. | OBSERVATION | ABOVE OR BELOW MEAN | UP OR DOWN |
|-------|-------------|---------------------|--------------------|
| 1 | 7.6 | B | |
| 2 | 7.59 | B | D |
| 3 | 7.67 | B | U |
| 4 | 7.74 | A | U |
| 5 | 7.83 | A | U |
| 6 | 7.819 | A | D |
| MEAN | 7.708167 | E _{AB} =1 | E _{UD} =2 |

A=above the mean, B=below the mean, U=Up from previous reading, D=Down from previous reading

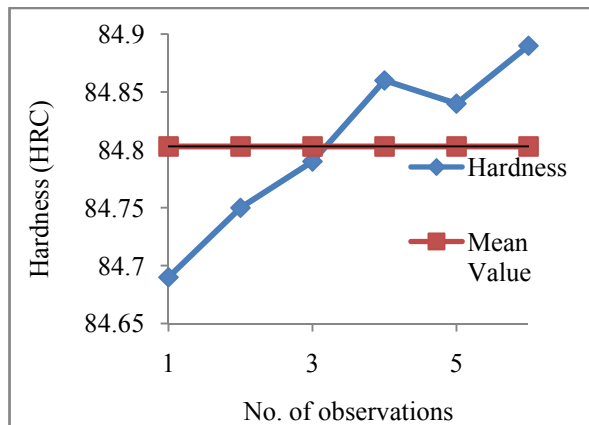


Fig. 3 Run-chart of the observed values of hardness

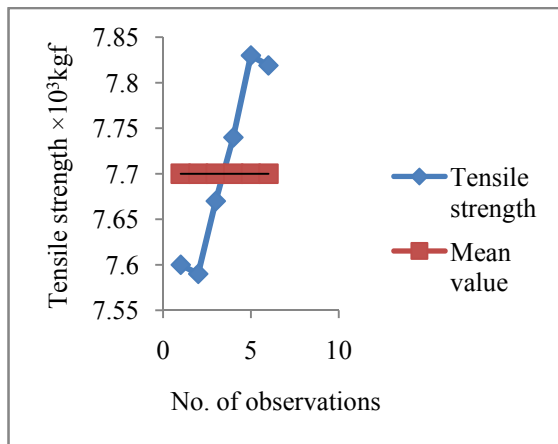


Fig. 4 Run-chart of the observed values of tensile strength

Calculation for Z (standard normal deviate) above and below:

$$E(\text{run})_{AB} = \left(\frac{N}{2} + 1\right)$$

Where N is the number of observations and E (run)_{AB} is the expected number of run above and below

$$E(\text{run})_{AB} = \left(\frac{6}{2} + 1\right) = 4$$

$$\sigma_{AB} = \sqrt{\left(N - \frac{1}{4}\right)}$$

Where σ_{AB} is the standard deviation of above and below

$$\sigma_{AB} = \sqrt{\left(6 - \frac{1}{4}\right)} = 1.118$$

$$Z_{AB} = \frac{\{R_{UN}_{AB} - E(\text{run})_{AB}\}}{\sigma_{AB}}$$

Where R_{UN}_{AB} is the actual number of run obtained above and below

$$Z_{AB} = \frac{(1-4)}{1.118} = -2.6834$$

$P_{AB} = \text{NORMSDIST}(Z)$ when the value of Z is negative (using microsoft excel software)

$$P = 0.003645$$

For up and down calculations:

$$E(\text{run})_{UD} = 2N - \frac{1}{3}$$

Where N is the number of observations and E (run)_{UD} is the expected number of run up and down.

$$E(\text{run})_{UD} = 2 \times 6 - \frac{1}{3} = 3.667$$

$$\sigma_{UD} = \sqrt{(16N - 29/90)}$$

Where σ_{UD} is the standard deviation for up and down

$$\sigma_{UD} = \sqrt{(16 \times 6 - 29/90)}$$

$$\sigma_{UD} = 0.8628$$

$$Z_{UD} = \frac{\{R_{UN}_{UD} - E(\text{run})_{UD}\}}{\sigma_{UD}}$$

$$Z_{UD} = (2-3.667)/0.8628$$

$$Z_{UD} = -1.5840$$

$P_{UD} = \text{NORMSDIST}(Z)$ when the value of z is negative (using microsoft formula)

$$P_{UD} = 0.056597$$

Normally decision making is done with certain margin of error 'α' & taken as equal to 0.005 that is there can 5% chances in arriving at wrong conclusion.

Decision making:

If $P_{AB} < \alpha$ OR /& $P_{UD} < \alpha$ then non-random pattern exist.

In the present case $P_{AB} < \alpha$ indicates existence of non random pattern

Now exercise of predicting various statistical or drawing conclusions should not be undertaken unless the normality of distribution has been verified. Even if one has a large data, superimposing of normal curve on the histogram it is more difficult task than it to be imagined. For histogram one require minimum of 50 observations, however more the better and for assessing whether the underlying distribution is normal or not becomes more difficult when the number of observations is fewer. For cumulative probability plot (Pi):

$$P_i = (S.N-0.5)/N$$

Where S.N is serial number of data observation arranged in ascending order, N is total number of observations in the data set. If the standard normal deviate follows normal

distribution that has mean $\mu = 0$ and standard deviation $\sigma = 1$, then:

$$f(Z) = 1/\sqrt{2\pi} e^{-\frac{z^2}{2}}$$

The equation above follows normal probability curve and any data close to it also follows normal probability curve. The values of standard normal deviate were calculated using cumulative probability and dimensional values were arranged in ascending order as shown in Table 7.

TABLE 7 STANDARD NORMAL DEVIATE AND OUTER DIAMETER IN ASCENDING ORDER

| S. No. | Pi (Cumulative Probability) | Std. Nor. Deviate Z | Observed hardness (HRC) | Observed tensile strength $\times 10^3 \text{kgf}$ |
|--------|-----------------------------|---------------------|-------------------------|--|
| 1 | 0.08333 | -1.382 | 84.69 | 7.6 |
| 2 | 0.25 | -0.674 | 84.75 | 7.59 |
| 3 | 0.416667 | -0.210 | 84.79 | 7.67 |
| 4 | 0.583333 | 0.210 | 84.86 | 7.74 |
| 5 | 0.75 | 0.674 | 84.84 | 7.83 |
| 6 | 0.91667 | 1.3829 | 84.89 | 7.819 |

Based on Table 7 normal probability curve was drawn to predict the probability as shown in Figure 5 and 6. As observed in Figure 5 and 6, the aforesaid data follows non random pattern and is under normal probability curve. So, there are very strong chances that the process is under statistical control however X-bar chart and R-bar chart cannot be drawn due to less number of observational data. The co-efficient of determination (R^2) having value 0.91 and 0.86 states that the hardness and tensile strength observational values lies in normal probability curve.

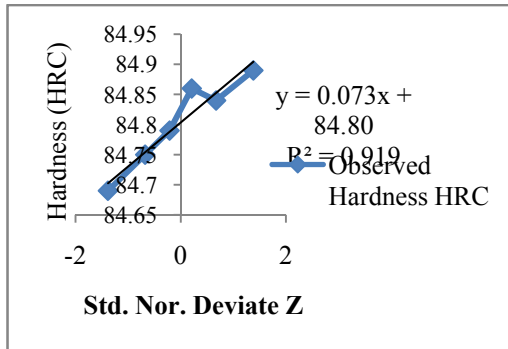


Fig. 5 Normal probability curve (for hardness at optimized settings)

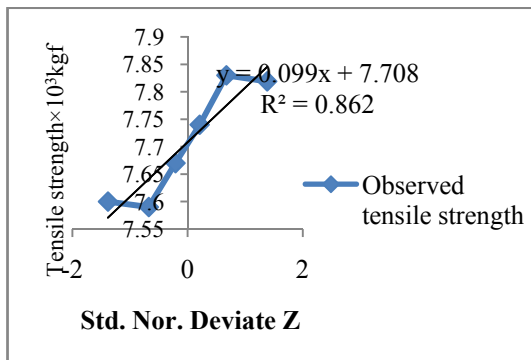


Fig. 6 Normal probability curve (for tensile strength at optimized settings)

IV. CONCLUSIONS

On the basis of experimental observations made on welded joints of 304SS during TIG welding following conclusions can be drawn.

The results of study highlights the statistically controlled solution for hardness and tensile strength of weld joints are concerned (within the range of selected input parameters) as regards to sensitization in TIG welding process. The adopted procedure is better for proof of concept. Strong possibilities are observed for the process under statistical control at optimized settings suggested by Taguchi design. Hence the process can be used for mass production at proposed settings with controlled sensitization.

REFERENCES

- [1] S. Natrajan and S.P B. Kumaresh, 2006, "Corrosion and its inhibition in SA213-T22 weldments used in power plants under neutral and alkaline environments", Material Science and Engineering Journal, 432, pp. 47-51.
- [2] A. A. S. Mousavi and R. Misersmaeilli, 2008, "Experimental and numerical analyses of residual stress distributions in TIG welding process for 304L stainless steel", Materials Processing Technology Journal, 208, pp. 383-394.
- [3] J. Qinglei., G. L.Yajian, W. J. Puchko and X. Chunzhi, 2010, "Microstructure characteristics in TIG welded joint of Mo-Cu composite and 18-8 stainless steel", Refractory Metals and Hard Materials Journal, 28, pp. 429-433.
- [4] J. Yan, M. Gao and X. Zengng, 2010, "Study on microstructure and mechanical properties of 304 stainless steel joints by TIG, laser and laser-TIG hybrid welding", Optics and Lasers in Engineering Journal, 48, pp. 512-517.
- [5] S. Kumar and A.S. Shahi, 2011, "Effect of heat input on the microstructure and mechanical properties of gas tungsten arc welded 304 stainless steel joints", Materials and Design Journal, 32, pp. 3617-3623.
- [6] A. Traidia and F. Roger, 2011, "Numerical and experimental study and weld pool behaviour for pulsed current Gas Tungsten Arc welding", Heat and Mass Transfer Journal, 54, pp. 2163-2179.
- [7] T. Yuri., T. Ogata, M. Saito and Y. Hirayama, 2000, "Effect of welding structure and delta ferrite on fatigue properties for TIG welded austenitic stainless steels at cryogenic temperatures", Cryogenics Journal, 40, pp. 251-259.
- [8] J.P. Singh and R. Singh, 2009, "Investigations for statistically controlled rapid casting solution of low brass alloys using three dimensional printing," International Journal of Rapid Manufacturing, 1(2), pp. 208-221.
- [9] R. Singh, 2012, "Effect of work piece volume on statistically controlled rapid casting solution of aluminum alloys using three dimensional printing," Materials and Manufacturing Processes, 27(4), pp.377-382.